

DECEUNINCK

FULLY REVERSIBLE WINDOW

FRAMING

- dedicated frame, sash and transom/mullion profiles

SEALS/GASKETS

- main profiles supplied with high-performance integral multifunctional seal/gasket
- unique arrow foot design woolpile (3rd seal)

REINFORCING

- galvanised steel profiles optimised for strength, rigidity and hardware fixing
- thermal reinforcement option for the outer frame

WINDOW STYLES

- single opening with or without a combined fixed light
- multilights combining the above elements

FABRICATION

- fully welded construction

GLAZING

- choice of two glazing bead styles
- glazing options from 5mm up to 42mm thickness
- Georgian bar

ANCILLARIES

- frame extensions, cills and head drip
- lightweight and structural coupling members
- dedicated cavity locking block

HARDWARE

- fully compatible with both Peder Nielsen (PN) and Yale reversible hinge systems
- typical espagnolette locking as standard

SECURITY

- Kitemarked approved to PAS 24 enhanced security standard

THERMAL INSULATION

- Uw 0.96 W/m²k
- WER C to A+

ACOUSTIC PERFORMANCE

- Rw (C ; Ctr) 41 (-1 ; -4) dB

DESIGN

- reduced rebate height provides improved frame installation
- flush finish
- patented Linktrusion® technology for enhanced thermal and structural performance
- complements classical and contemporary architecture
- personalise with glazing bead options
- white colour RAL 9016
- oil colour options available from stock
- Decoroc® colours and more foils on request

SIZE LIMITATION AND PERFORMANCE CHARACTERISTICS

WINDOW TYPE	LENGTH (MM) - MAXIMUM	HEIGHT (MM) - MAXIMUM	AREA (M ²) - MAXIMUM	FRICTION STAYS (UP TO & INCLUDING)	TRANSOM/MULLION LENGTH (MM) INC. FRAME - MAXIMUM	AIR PERMEABILITY CLASSIFICATION	WATER TIGHTNESS CLASSIFICATION	RESISTANCE TO WIND CLASSIFICATION	EXPOSURE CATEGORY AS GIVEN IN TABLE 1 OF BS 6375-1
-------------	--------------------------	--------------------------	-------------------------------------	---------------------------------------	--	------------------------------------	-----------------------------------	--------------------------------------	--

SASH DIMENSIONS FOR WINDOWS WITH APPROVED SASH PROFILES

FULLY REVERSIBLE	1400	1400	-	51"	-	4	E1050	AE	2400
FIXED	2000	2000	4	-	-	4	9A	A5	2000

OVERALL DIMENSIONS FOR APPROVED OUTER FRAMES AND TRANSOM/MULLION PROFILES

MULTILIGHT - STEEL TRANSOM/MULLION REINFORCEMENT	2400	2400	7600	-	1400	4	9A	A5	2000
--	------	------	------	---	------	---	----	----	------

FULLY REVERSIBLE WINDOW VERTICAL SECTION

deceuninck

nbsPlus

riba
product
selector

nbs
BIM


TECHNICAL AND SPECIFICATION SUPPORT

Specification Support forms an essential link between architects, specifiers and approved Deceuninck fabricators and installers. The team provide informed guidance on the use of products, samples, drawings and specifications with contact maintained throughout each stage of a contract to completion.

Deceuninck can offer a technical design service for suitable schemes embracing:



- product selection and application
- technical review to confirm compliance with Building Regulations
- advice on exposure conditions
- wind load calculations
- framing construction and design solutions
- generation of scheme drawings for tendering purposes
- technical specification
- window samples for client/authority approval


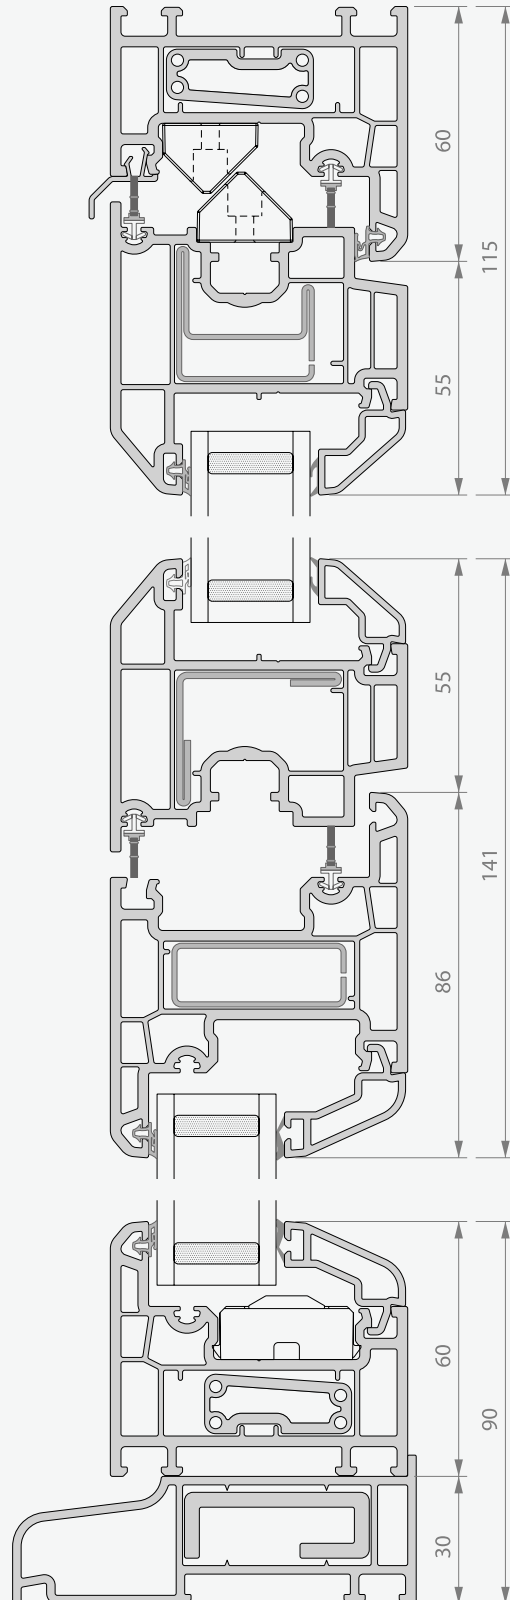


FULLY
REVERSIBLE
WINDOW



FULLY REVERSIBLE WINDOW

MAXIMUM SASH DIMENSIONS

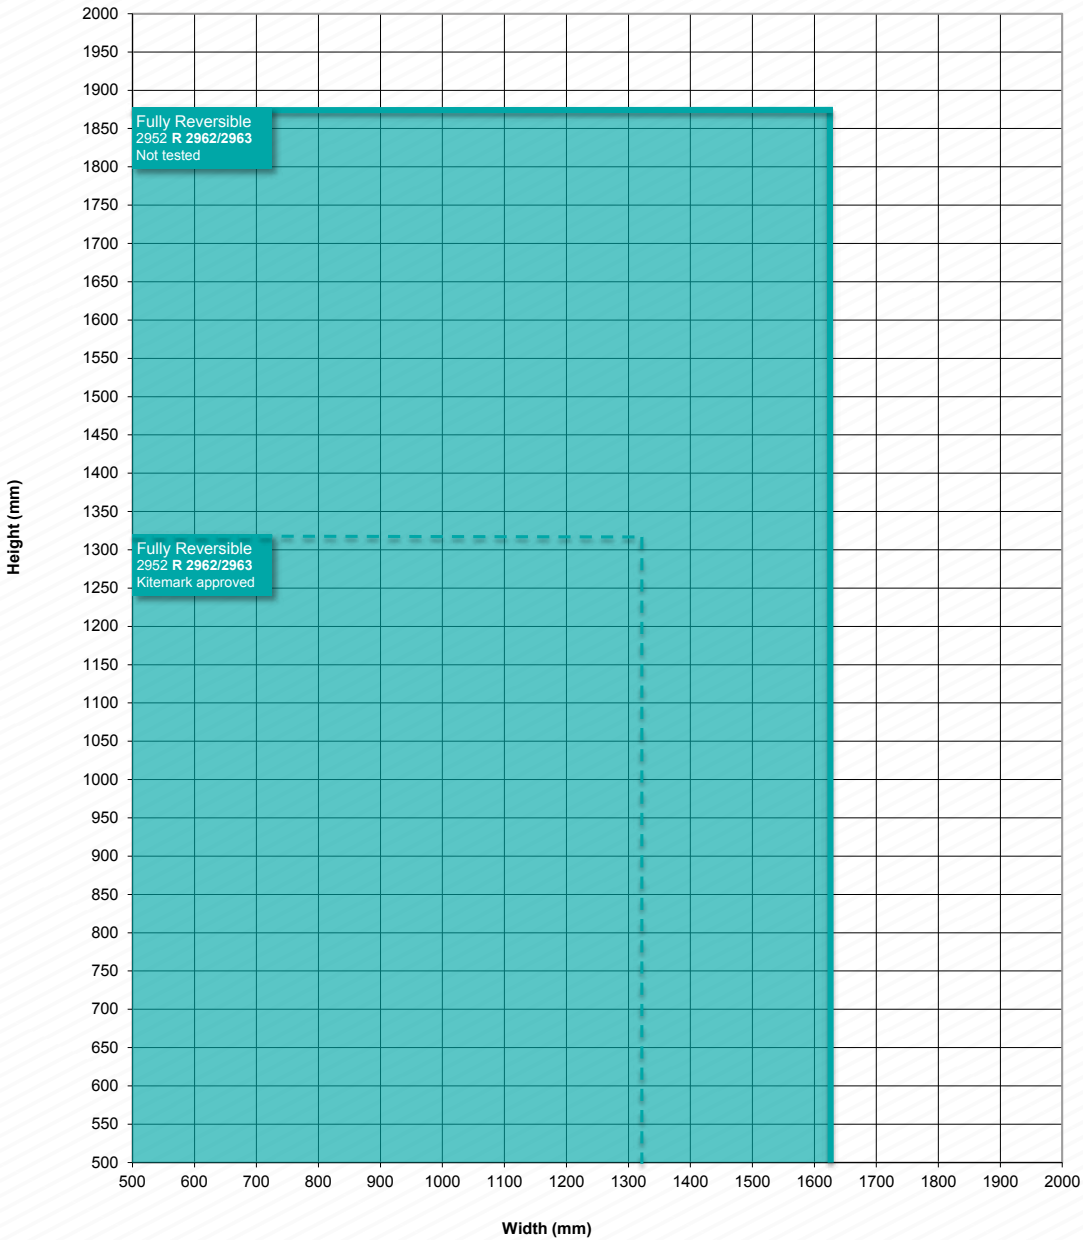

FULLY REVERSIBLE WINDOW PRODUCT RANGE

deceuninck

